






VERTICAL LAMINAR AIRFLOW BEM1BC2 (BLVR-306)



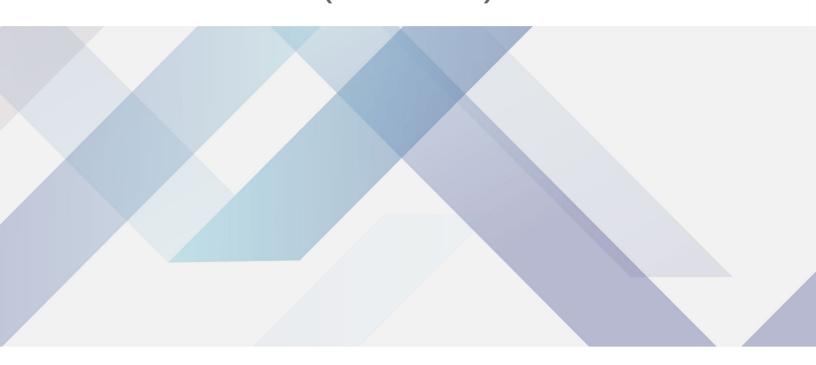

VERTICAL LAMINAR AIRFLOW BEM1BC2

ETL CERTIFIED VERTICAL LAMINAR FLOW CABINET



UV Lamp, Emission of 253,7 nanometers for most efficient decontamination Waterproof Socket, America Standard Footmaster Caster, Universal caster with brake and leveling feet Wind Speed Sensor, Direct measurement of wind speed

- 1. ETL certified, Satisfy North American market.
- 2. With memory function in case of power-failure.
- 3. Audio and visual alarm(Abnormal airflow velocity).
- 4. Interlock function: UV Lamp and blower, LED Lamp.

SPECIFICATIONS

Model	BEM1BC2
Old Model	BLVR-306
Exteral Size(W*D*H)	1500*700*(2090~2340)mm
Internal Size(W*D*H)	1400*575*625mm
Work Surface Height	760~1010mm
Max Opening	480mm
Display	LCD Display
Airflow Velocity	80~99fpm
Material	Working area: 304 stainless SteelMain Body: Cold-rolled steel with anti-bacteria powder coating.Front Window: Motorized,5mm toughened glass, anti-UV
Pre-Filter	Polyester fiber
HEPA Filter	One,99.995% efficiency at 0.3µm
Noise	≤68dB(A)
Illumination	≥3001
Waterproof Sockets	One socket (Double type), America standard, Max. Power: 500W
Power Supply	103.5~126.5V, 60Hz, 10A
Consumption	1110W
UV Lamp	40W*1
LED Lamp	18W*1
Standard Accessory	Manually height adjustable base stand,LED lamp, UV lamp, wind speed sensor, waterproof socket
Package Size (W*D*H)	1645*990*1610mm
Gross Weight	280kg
Alt Name	ETL Certified Vertical Laminar Flow Cabinet

FEATURES

UV Lamp, Emission of 253,7 nanometers for most efficient decontamination



Waterproof Socket, America Standard



Footmaster Caster, Universal caster with brake and leveling feet



Wind Speed Sensor, Direct measurement of wind speed



- 1. ETL certified, Satisfy North American market.
- 2. With memory function in case of power-failure.
- 3. Audio and visual alarm(Abnormal airflow velocity).
- 4. Interlock function: UV Lamp and blower, LED Lamp.



Biolab Scientific Ltd.