



## LABORATORY LOW SPEED CENTRIFUGE BET1W2 (BCFL-101)

# LABORATORY LOW SPEED CENTRIFUGE BET1W2

## LOW SPEED LARGE CAPACITY CENTRIFUGES



- With single-chip microcomputers, self-developed control boards and high-torque AC brushless motors, these concentrators can run stably with lower noise, allowing for a comfortable laboratory environment.
- Early warning functions such as overspeed, overheating, imbalance, undervoltage, and overvoltage warnings; three-stage damping shock absorber, a specially combined shock absorbing device to ensure the motor runs smoothly and safely and prevent samples from resuspending, thus securing excellent centrifugal effect.
- TFT-LCD true color display screen, dual operation modes of touch screen and physical keys, and special keys for centrifugal force display, display of the set parameters and operating parameters at the same time, modification of parameters at any time during operation without interruption; intuitive, simple, and easy-to-use interface; operation menu in multiple languages.


## SPECIFICATIONS

Model	BET1W2
Old Model	BCFL-101
Max speed	5,000r/min
Max RCF	4,800xg
Max capacity	6x500mL
Speed accuracy	±30r/min (customizable, multiples of 10)
Number of running programs	20
Control and drive system	High torque AC brushless motor, microcomputer control
Timer range	1min~99h59min59s, with continuous centrifugation and instantaneous centrifugation
Noise	≤65dB(A)
Total power	800W
Weight	85kg
Dimensions (LxWxH)	580mmx740mmx800mm
Alt Name	Low Speed Large Capacity Centrifuges

## ACCESSORIES FOR PURCHASE

No	Name	Description
1	Fixed-angle Rotor 12x15ml (through holes)	Max RPM: 5,000r/min Max RCF: 2,600xg/2,800xg
2	Swing-out rotor 124 holes x2mL/5mL (vacuum blood collection tube)	Max RPM: 4,000r/min Max RCF: 3,580xg
3	Swing-out rotor 148 holes x2mL/5mL (vacuum blood collection tube)	Max RPM: 4,000r/min Max RCF: 3,520xg
4	Swing-out rotor 4x500ml	Max RPM: 4,000r/min Max RCF: 3,360xg
5	Swing-out rotor	Max RPM: 5,000r/min Max RCF: 4,800xg

6	Tube rack 5mL (ordinary tube)	Number of centrifuges: 5mLx48 holes Max r/min: 4,000r/min Max RCF: 2,360xg
7	Tube rack 5mL (blood collection tube)	Number of centrifuges: 5mLx48 holes Max r/min: 4,000r/min Max RCF: 2,830xg
8	Tube rack 15mL	Number of centrifuges: 15mLx16 holes Max RPM: 5,000r/min Max RCF: 4,620xg
9	Tube rack 10/15mL	Number of centrifuges: 15mLx24 holes Max RPM: 5,000r/min Max RCF: 4,620xg
10	Tube rack 15mL	Number of centrifuges: 15mLx32 holes Max RPM: 4,000r/min Max RCF: 2,960xg
11	Tube rack 50mL	Number of centrifuges: 50mLx8 holes Max RPM: 4,000r/min Max RCF: 2,960xg
12	Tube rack 100mL	Number of centrifuges: 100mLx4 holes Max RPM: 5,000r/min Max RCF: 4,800xg
13	Tube rack 100mL	Number of centrifuges: 100mLx8 holes Max RPM: 4,000r/min Max RCF: 3,070xg
14	Swing-out rotor	Max RPM: 4,000r/min Max RCF: 3,390xg
15	Tube rack 5mL (blood collection tube)	Number of centrifuges: 5mLx76 holes Max RPM: 4,000r/min Max RCF: 3,020xg
16	Tube rack 250mL (flat bottom)	Number of centrifuges: 250mLx4 holes Max RPM: 4,000r/min Max RCF: 2,840xg
17	Tube rack 250mL (conical bottom)	Number of centrifuges: 250mLx4 holes Max RPM: 4,000r/min Max RCF: 3,390xg
18	Swing-out rotor 6x500mL	Max RPM: 3,600r/min Max RCF: 2,960xg Standard hood
19	Swing-out rotor 4x750ml	Max RPM: 4,000r/min Max RCF: 3,520xg
20	Microplate Rotor 2x2x96 holes	Max RPM: 4,000r/min Max RCF: 2,360xg
21	Microplate Rotor 4x2x96 holes	Max RPM: 4,000r/min Max RCF: 3,000xg

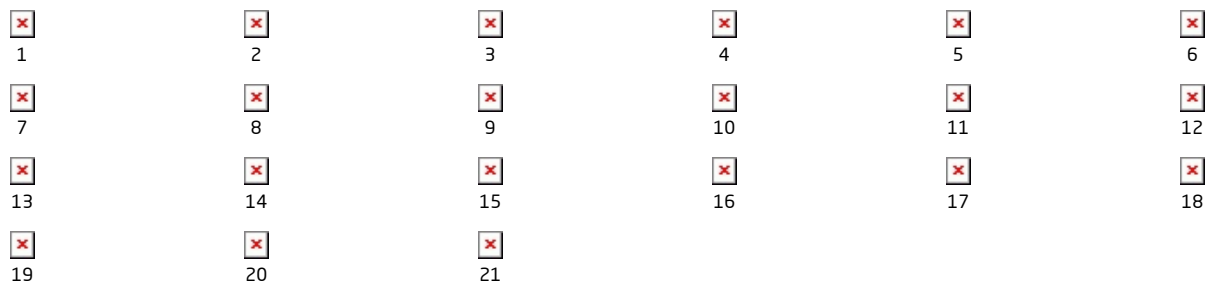

## FEATURES

- With single-chip microcomputers, self-developed control boards and high-torque AC brushless motors, these concentrators can run stably with lower noise, allowing for a comfortable laboratory environment.
- Early warning functions such as overspeed, overheating, imbalance, undervoltage, and overvoltage warnings; three-stage damping shock absorber, a specially combined shock absorbing device to ensure the motor runs smoothly and safely and prevent samples from resuspending, thus securing excellent centrifugal effect.
- TFT-LCD true color display screen, dual operation modes of touch screen and physical keys, and special keys for centrifugal force display, display of the set parameters and operating parameters at the same time, modification of parameters at any time during operation without interruption; intuitive, simple, and easy-to-use interface; operation menu in multiple languages.
- Biosafety air-tight fix-angle rotor adopting an integral silicone rubber sealing ring (EU RoHS 2015/863) to avoid aerosol overflow and fully ensure the safety of operators and lab environments.
- Stainless steel centrifugal chamber at the rear equipped with an all-steel plastic-sprayed housing, integrally formed stamping steel front cover, and a three-layer steel protective cover, which is sturdy and durable to ensure the safety of operators and labs.
- Silent, easy-to-use mechatronics motor door lock (gently close the door, and the locking system will be triggered to lock the door securely).
- 10 levels speed-up and speed-down control; storage of up to 20 sets of user-defined programs; easy calling of frequently used programs (the last used programs are called when the device is powered on).
- Paired with forged aerospace aluminum rotors (fix-angle rotors only) and a variety of optional polyamide fiber adapters, the centrifuges are suitable for 0.2mL to 750mL centrifuge tubes or reagent bottles and are able to centrifugate all types of MTP microplates, PCR plates, cell culture plates and deep well plates.
- CFDA registration and production qualification, with ISO 9001 (2015) and ISO 13485 (2016) certifications.

## APPLICATIONS

Extraordinary experimental throughput and ergonomic design. With an experimental throughput as high as 4x750ml, they are ideal devices for low-speed refrigerated high-throughput applications, with extraordinary versatility. They are widely used in experiments and scientific research in the fields of biology, chemistry, medicine, agriculture and forestry, food safety, blood stations, clinical trials, etc.

## MORE INFO

Tube rack	Adapter
10mL	1x1.5/2mL, 1x5mL
15mL	1x1.5/2mL, 1x5mL, 1x10mL
50mL	3x1.5/2mL, 1x5mL, 1x10mL, 1x10mL, 1x15mL, 1x20mL, 1x30mL
100mL	3x1.5/2mL, 4x5mL, 1x50mL
250mL	12x1.5/2mL, 9x5mL, 7x10mL, 1x50mL, 1x100mL
500mL	18x5mL, 12x10mL, 8x15mL, 4x50mL, 1x100mL, 1x250mL
750mL	27x5mL, 15x10mL, 12x15mL, 7x50mL, 3x100mL, 1x300mL, 1x500mL



**Biolab Scientific Ltd.**

Trillium Executive Center, East Tower, 675 Cochrane Dr, Markham, Ontario L3R 0B8, Canada  
Email: [info@biolabscientific.com](mailto:info@biolabscientific.com) | Website: [www.biolabscientific.com](http://www.biolabscientific.com)