






BLOOD BANK REFRIGERATED CENTRIFUGE BEW1C1 (BBRC-204)



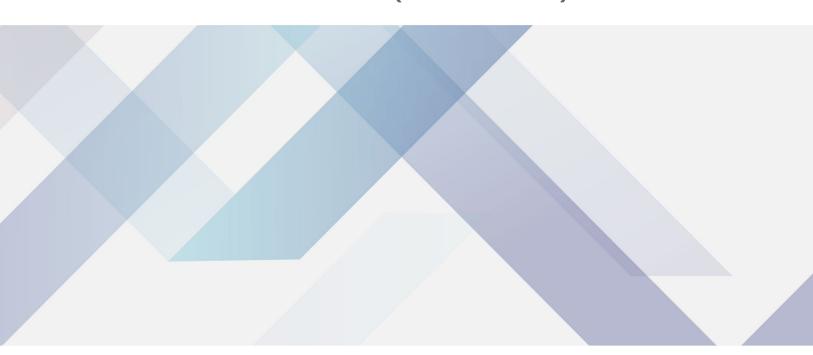

BLOOD BANK REFRIGERATED CENTRIFUGE BEW1C1

FLOOR-STANDING HIGH-CAPACITY REFRIGERATED CENTRIFUGE



The max speed is 8000rpm, and the largest capacity of swing rotor is 6x2400ml. It has micro-computer control, electronic lock and AC variable-conversion motor which delivers high torque.

Imported compressor unit with Non-CFC refrigerant R404a.

It has self-locking, over-speed detection, over-temperature detection, imbalance detection that is an automatic alarm device.

9 levels acceleration and 9 levels deceleration.

Silastic sealed ring comfort to GMP, US FDA certificated.

SPECIFICATIONS

Model	BEW1C1
Old Model	BBRC-204
Max speed	8000 r/min
Max RCF	11260 xg
Max capacity	6x2400 ml
Speed accuracy	±10 r/min
Time setting	1s~99h 59min59s
Temperature setting	-20°C ~ +40°C
Temperature accuracy	±1℃
Compressor unit	French Tecumseh Compressor Unit R404a
Noise	<70 dB(A)
Power supply	AC380V 50Hz 40A
Consumption	7.5 kW
Alt Name	Floor-standing High-Capacity Refrigerated Centrifuge

ACCESSORIES FOR PURCHASE

No	Name	Description
1	Rotor	Capacity: 6x500ml Max Speed: 8000r/min Max RCF: 11260xg Adaptor: 50ml, 100ml, 250ml
2	Swing Rotor	Capacity: 6x2000ml Max Speed: 4000r/min Max RCF: 6260xg
3	Adapter	2000ml Steel Bucket
4	Adapter	316L SS Bucket
5	Adapter	2000ml PP Bottle
6	Swing Rotor	Capacity: 6x2x1000ml Max Speed: 4000r/min Max RCF: 6260xg
7	Adapter	2x1000ml Steel Bucket

8	Swing Rotor	Capacity: 6x2400ml Max Speed: 4500r/min Max RCF: 6950xg
9	Adapter	2400ml Oval Steel Bucket
10	Adapter	2400ml Oval Bottle
11	Adapter	Individual Adaptor
12	Adapter	Interlayer Adaptor





Biolab Scientific Ltd.