



DRY BATH INCUBATOR BFA1BT1 (BDIB-101)

DRY BATH INCUBATOR BFA1BT1

DRY BATH INCUBATOR

They has high precision of temperature control and good sample preparation parallelism with microprocessor-controlled thermostat to replace the traditional water bath devices. It can be widely used in the cultivation and preservation of samples , DNA amplification, the electrophoresis of denaturation and serum coagulation. Application sectors throughout pharmaceutical, chemical, food safety, environment, quality inspection, etc.



Fast heating speed, uniform heating, accurate temperature control, high stability, low energy consumption and no noise.

Built in temperature calibration function, automatic fault detection and buzzer alarm function.

Built-in over-temperature protection devices, safe and reliable, enhance the service life of the machine.

Product designed compact and tight, occupied little space. Using freer and easier. Various blocks for convenient replacement, easy for cleaning and disinfection. The power recovery function can restore the original run automatically after recovery.

Programmable function. It can also set continuous operation by uncertain time.


SPECIFICATIONS

Model	BFA1BT1
Old Model	BDIB-101
Temp. Control Range	R.T.+5°C~100°C
Temp. Max. Decrease	/
Temp. Setting Range	5°C~100°C
Temp. Stability@100°C	±0.5°C
Temp. Stability@40°C	±0.3°C
Temp. Stability@4°C	/
Block Temp. Uniformity	±0.3°C
Temp. Display Accuracy	0.1°C
Heating Speed	≤15min (20°C to 100°C)
Cooling Speed	/
Time Range	1min~99h59min or continuous
Voltage	AC 220V / AC 110V, 50/60Hz
Power	150W
Fuse	250V, 1A/2A, Φ5x20
Dimension	W.196 x D.270 x H.170mm
Net Weight	2.2kgs
Alt Name	Dry Bath Incubator

ACCESSORIES FOR PURCHASE

No	Spec	Dia. of hole	Name	Block dimension
1	0.2 ml x 96	6.7 mm	Cone bottom	107 x 71 x 20 mm
2	0.5 ml x 54	8 mm	Cone bottom	107 x 71 x 25 mm
3	1.5 ml x 35	10.8 mm	Cone bottom	107 x 71 x 32 mm
4	2.0 ml x 35	10.8 mm	Round bottom	107 x 71 x 32 mm
5	0.5 ml x 20 + 1.5 ml x 15	8 mm / 10.8 mm	Cone bottom	107 x 71 x 32 mm
6	≤Φ12mm x 24	12 mm	Flat bottom	107 x 71 x 32 mm

7	0.2 ml x 32 + 1.5 ml x 25	6.1 mm / 10.8 mm	Cone bottom	107 x 71 x 32 mm
8	0.2 ml x 32 + 0.5 ml x 10 + 1.5 ml x 15	6.1 mm / 8 mm / 10.8 mm	Cone bottom	107 x 71 x 32 mm
9	Water Bath	103 x 67 x 30 mm	Flat bottom	107 x 71 x 32 mm
10	Flat bottom plates	Top size 69 x 107 x 12 mm	Flat plate block	116 x 71 x 15 mm
11	5 ml x 24	13.5 mm	Flat bottom	107 x 71 x 32 mm
12	15 ml x 12	16.9 mm	Flat bottom	107 x 71 x 32 mm
13	50 ml x 6	29.5 mm	Flat bottom	107 x 71 x 100 mm
14	Customized	Customized	Customized	Customized
15			Cover A	
16			Cover B	Choose J block can be used with 96-well ELISA plate and 96-well PCR plate (half skirt, full skirt)
17			Metal cover	Choose J block can be used with deep well plate

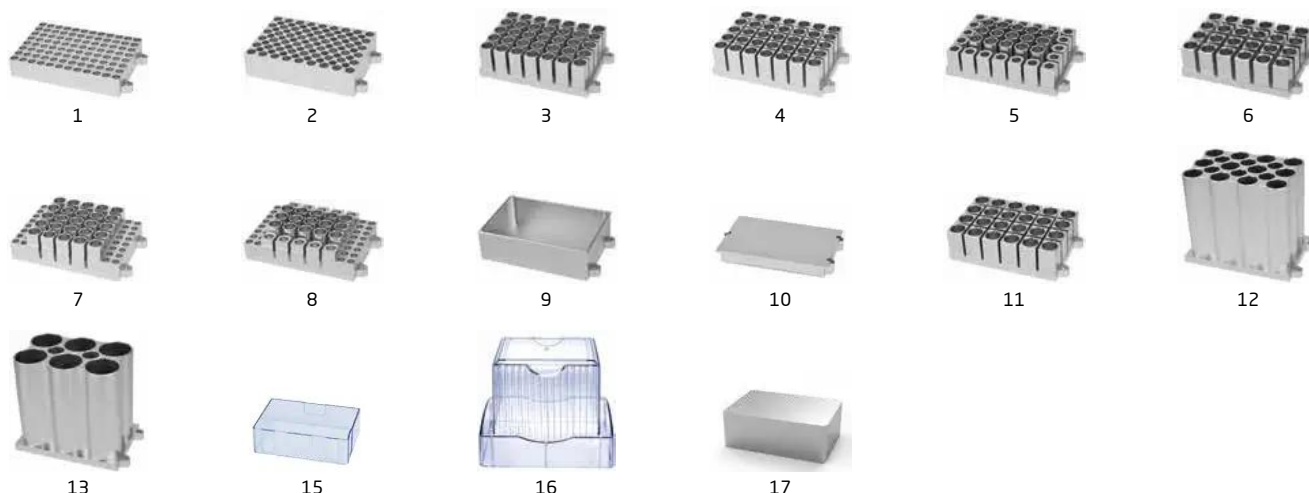

FEATURES

Fast heating speed, uniform heating, accurate temperature control, high stability, low energy consumption and no noise.
 Built in temperature calibration function, automatic fault detection and buzzer alarm function.
 Built-in over-temperature protection devices, safe and reliable, enhance the service life of the machine.
 Product designed compact and tight, occupied little space. Using freer and easier.
 Various blocks for convenient replacement, easy for cleaning and disinfection.
 The power recovery function can restore the original run automatically after recovery.
 Programmable function. It can also set continuous operation by uncertain time.
 LCD display. Cool and compact designed appearance. Simultaneous display temperature and diminishing time.



Biolab Scientific Ltd.

Trillium Executive Center, East Tower, 675 Cochrane Dr, Markham, Ontario L3R 0B8, Canada
 Email: info@biolabscientific.com | Website: www.biolabscientific.com