






LABORATORY BENCHTOP FREEZE DRYER BFR1I3 (BFFT-419)



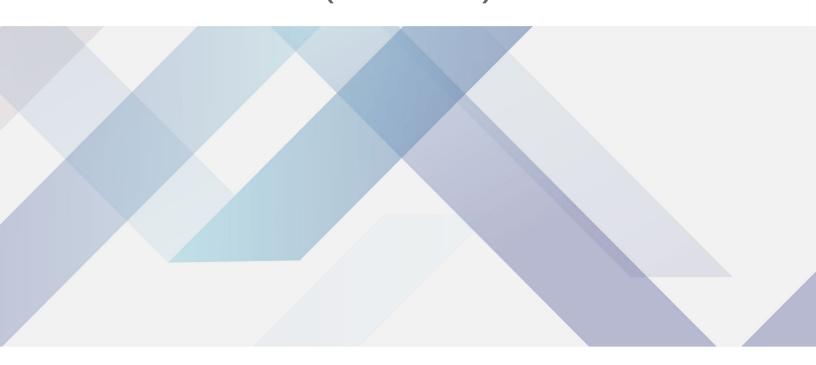

LABORATORY BENCHTOP FREEZE DRYER BFR113

LAB FREEZE DRYER

Laboratory freeze-dryer, which handles product capacities from 2.5 kg to 24 kg per drying cycle.

It is particularly suited to standard applications in round-bottomed or similar flasks and small quantities in product trays and other containers.IOT Remote accessable of Cell Phone.



Development and production of freeze-drying machines, the Pioneer laboratory freeze-dryer's performance, stability, and control system all reach the top industry standards:

7 inch touch-control system, simple operation.

Display Critical data: condenser temperature, sample temperature and vacuum; display graph and data recording. vacuum and temperature correction to ensure long-term accuracy in use.

Power-off auto-recovery function: Allows customers to set the power-off restart time Alarm and prompt functions to prevent misoperation.

Optional mobile phone/computer remote monitoring.

SPECIFICATIONS

Model	BFR1I3
Old Model	BFFT-419
condenser temperature	-60℃
Ice condenser capacity	6L/24h
Dimension(mm)	518*860*707 (without chamber)
Vacuum pressure(Pa)	<1Pa (standard <5Pa)
vacuum pump	2XZ-4 (4L/S)
*optional vacuum pump	DRV-10 (10^3/h), low noisy and better performance
*vacuum control(optional)	
Refrige system	Auto Cascade
Defrost	Heating coil
Rated power	1200W
Net weight(Appro)	(without vacuum pump, vacuum pump 20kg)
Alt Name	Lab Freeze Dryer

ACCESSORIES FOR PURCHASE

No	Name
110	Nume
1	DRV Vacuum Pump
2	vacuum control



FEATURES


Development and production of freeze-drying machines, the Pioneer laboratory freeze-dryer's performance, stability, and control system all reach the top industry standards:

7 inch touch-control system, simple operation.

Display Critical data: condenser temperature, sample temperature and vacuum; display graph and data recording. vacuum and temperature correction to ensure long-term accuracy in use.

Power-off auto-recovery function: Allows customers to set the power-off restart time Alarm and prompt functions to prevent misoperation.

Optional mobile phone/computer remote monitoring.





Biolab Scientific Ltd.