


GENERAL PURPOSE INCUBATOR BGI-1702

GENERAL PURPOSE INCUBATOR BGI-1702

TWO & FOUR CHAMBERS HEATING INCUBATOR

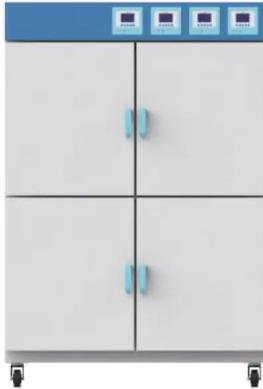

- Two or four chambers are available, effectively saving laboratory space
- Each chamber is independently controlled, without mutual interference, precise and stable temperature control;
- 304 stainless steel inside , easy to clean and maintain
- Natural heating convection ,no noise, avoiding evaporation of samples during the test.
- With inner glass door for easy observation
- PID controller, accurate temperature control with small fluctuation, with timer function of time 99 hours and 59 minutes.
- Independent over-temperature alarm system ensures experiments running safely.(option)

SPECIFICATIONS

Model	BGI-1702
Voltage	AC220V 50HZ
Temp Range	RT+5~65°C
Display Resolution	0.1°C
Temp Stability	±0.5°C
Ambient Temperature	+5~35°C
Power Consumption	1500W
Chamber Volume	100Lx4
Interior Dimension (WxDxH)mm	455x430x510 /Chamber
External Dimension (WxDxH)mm	1220x616x1620
Shelves	2PCS (each chamber)
Alt Name	Four Chambers Heating Incubator



Biolab Scientific Ltd.

Trillium Executive Center, East Tower, 675 Cochrane Dr, Markham, Ontario L3R 0B8, Canada

Email: info@biolabscientific.com | Website: www.biolabscientific.com