




## GENERAL PURPOSE INCUBATOR BGI1R1

# GENERAL PURPOSE INCUBATOR BGI1R1

## TWO & FOUR CHAMBERS HEATING INCUBATOR

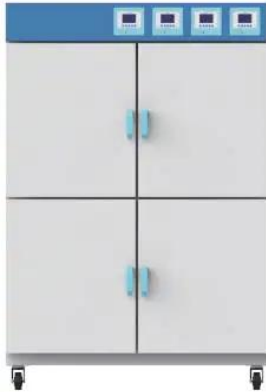

- Two or four chambers are available, effectively saving laboratory space
- Each chamber is independently controlled, without mutual interference, precise and stable temperature control;
- 304 stainless steel inside , easy to clean and maintain
- Natural heating convection ,no noise, avoiding evaporation of samples during the test.
- With inner glass door for easy observation
- PID controller, accurate temperature control with small fluctuation, with timer function of time 99 hours and 59 minutes.
- Independent over-temperature alarm system ensures experiments running safely.(option)

## SPECIFICATIONS

Model	BGI1R1
Voltage	AC220V 50HZ
Temp Range	RT+5~65°C
Display Resolution	0.1°C
Temp Stability	±0.5°C
Ambient Temperature	+5~35°C
Power Consumption	1200W
Chamber Volume	150Lx2
Interior Dimension (WxDxH)mm	560x530x600 /Chamber
External Dimension (WxDxH)mm	705x740x1800
Shelves	2PCS (each chamber)
Alt Name	Two Chambers Heating Incubator



**Biolab Scientific Ltd.**

Trillium Executive Center, East Tower, 675 Cochrane Dr, Markham, Ontario L3R 0B8, Canada

Email: [info@biolabscientific.com](mailto:info@biolabscientific.com) | Website: [www.biolabscientific.com](http://www.biolabscientific.com)